

Material Handling Solutions

Zollys[®]

• • • the passion for moving



... the passion for moving

The handling specialists

Zallys is a manufacturer of **electric movers** for various branches of industry including logistics, construction and distribution chains, but also airports, hospitals and much more. For more than **25 years** we have been present on the international market with a network of over **60 distributors worldwide**. The experience in designing and manufacturing professional electric vehicles has made **Zallys** a leading company in the sector, capable of satisfying any need related to the movement of wheeled loads and the transport of goods or people.



Adriano Zamberlan
Founder & CEO

A Brand with a History



Zallys is supported by a dynamic team of professionals supported by a network of certified local suppliers. This close collaboration guarantees direct and constant control over the quality of materials, essential for the creation of high-end products, reflecting the trust established over time.



Product range

Standard vehicles

AISI 316



M1



1.000 kg



4,0 km/h



15 %

Scan this QR code for
further information:



Technical data

Certification	CE
Traction force at hook	600 N
Max. tow on flat ground	1.000 kg
Max. forward speed	4,0 km/h
Max. backwards speed	4,0 km/h
Max. slope	15 %

Batteries	AGM 22 Ah / AGM 30 Ah
Weight (excl. batteries)	40 kg
Length	943 mm
Width	439 mm
Height	978 mm
Steering diameter	0,90 m



M12

1.500 kg

5,0 km/h

15 %

Scan this QR code for further information:



Also available in
st. steel AISI 316

Technical data

Certification	CE
Traction force at hook	900 N
Max. tow on flat ground	1.500 kg
Max. forward speed	5,0 km/h
Max. backwards speed	5,0 km/h
Max. slope	15 %

Batteries	AGM 30 Ah / AGM 45 Ah
Weight (excl. batteries)	50 kg
Length	700 mm
Width	535 mm
Height	1.256 mm
Steering diameter	0,90 m





M4



3.000 kg



4,5 km/h



15 %

Scan this QR code for further information:



Technical data

Certification	CE
Traction force at hook	1.600 N
Max. tow on flat ground	3.000 kg
Max. forward speed	4,5 km/h
Max. backwards speed	4,5 km/h
Max. slope	15 %

Batteries	AGM 130 Ah
Weight (excl. batteries)	63 kg
Length	1.397 mm
Width	720 mm
Height	1.005 mm
Steering diameter	1,30 m





M5

4.000 kg

5,5 km/h

15 %

Scan this QR code for further information:



Technical data

Certification	CE
Traction force at hook	1.800 N
Max. tow on flat ground	4.000 kg
Max. forward speed	5,5 km/h
Max. backwards speed	5,5 km/h
Max. slope	15 %

Batteries	AGM 130 Ah
Weight (excl. batteries)	90 kg
Length	1.539 mm
Width	784 mm
Height	966 mm
Steering diameter	1,50 m



M9



3.000 kg



4,5 km/h



15 %



Also available
Remote control

Scan this QR code for
further information:




Technical data


Certification	CE
Traction force at hook	1.600 N
Max. tow on flat ground	3.000 kg
Max. forward speed	4,5 km/h
Max. backwards speed	4,5 km/h
Max. slope	15 %

Batteries	AGM 130 Ah
Weight (excl. batteries)	66 kg
Length	1.439 mm
Width	720 mm
Height	1.030 mm
Steering diameter	1,60 m



M6.5

 6.000 kg

 300 kg

 4,5 km/h

Scan this QR code for further information:



Also available with
Electric lifting system

Technical data

Certification	CE
Traction force at hook	2.400 N
Max. tow on flat ground	6.000 kg
Lifting capacity <i>(optional)</i>	300 kg
Max. forward speed	4,5 km/h
Max. backwards speed	4,5 km/h
Max. slope	15 %

Batteries	AGM 130 Ah
Weight (excl. batteries)	94 kg
Length	1.568 mm
Width	748 mm
Height	1.250 mm
Steering diameter	2,50 m



M10



15.000 kg



5,0 km/h



15 %

Scan this QR code for
further information:



Technical data

Certification	CE
Traction force at hook	3.900 N (7.000 with upgrade)
Max. tow on flat ground	10.000 kg (15.000 with upgrade)
Max. forward speed	5,0 km/h
Max. backwards speed	5,0 km/h
Max. slope	15 %

Batteries	AGM 350 Ah
Weight (excl. batteries)	253 kg
Length	1.810 mm
Width	925 mm
Height	1.234 mm
Steering diameter	2,51 m



M20

 30.000 kg

 4,5 km/h

 15 %

Scan this QR code for further information:



Technical data

Certification	CE
Traction force at hook	14.500 N
Max. tow on flat ground	30.000 kg
Max. forward speed	3,0 km/h
Max. backwards speed	3,0 km/h
Max. slope	15 %

Batteries	AGM 450 Ah
Weight (excl. batteries)	1.300 kg
Length	1.631 mm
Width	940 mm
Height	1.308 mm
Steering diameter	2,00 m





M16



6.000 kg



1.800 kg



4,0 km/h

Scan this QR code for further information:



Technical data

Certification	CE
Traction force at hook	1.100 N
Max. tow on flat ground	6.000 kg
Lifting capacity	1.800 kg
Max. forward speed	4,0 km/h
Max. backwards speed	4,0 km/h

Batteries	AGM 45 Ah
Weight (excl. batteries)	142 kg
Length	1.266 mm
Width	464 mm
Height	1.090 mm



M18



20.000 kg

8.000 kg

3,0 km/h

Scan this QR code for further information:



Technical data

Certification	CE
Traction force at hook	9.500 N
Max. tow on flat ground	20.000 kg
Lifting capacity	8.000 kg
Max. forward speed	3,0 km/h
Max. backwards speed	3,0 km/h

Batteries	AGM 240 Ah
Weight (excl. batteries)	366 kg
Length	1.640 mm
Width	632 mm
Height	1.174 mm
Steering diameter	2,30 m



JESPI



 1.000 kg
  3.000 kg
  5,5 km/h
  30 %

Scan this QR code for further information:




Also available
L version (+ 500mm)

Technical data

Certification	CE
Max. load capacity on flat ground	1.000 kg
Traction force at hook	1.600 N
Max. tow on flat ground	3.000 kg
Max. forward speed	5,5 km/h
Max. backwards speed	5,5 km/h
Max. slope	30 %

Batteries	AGM 130 Ah
Weight (excl. batteries)	81 kg
Length	1.672 mm
Width	797 mm
Height	1.227 mm
Steering diameter	4,00 m



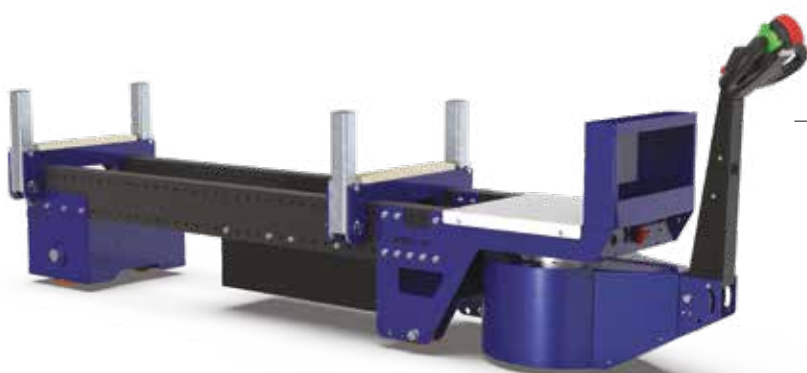

M8

 3.000 kg

 4,0 km/h

Scan this QR code for further information:



Technical data

Certification	CE
Max. load capacity on flat ground	3.000 kg
Max. forward speed	4,0 km/h
Max. backwards speed	4,0 km/h
Batteries	AGM 240 Ah

Weight (excl. batteries)	1.300 kg
Length	2.997 - 4.747 mm
Width	543 mm
Height	1.223 mm
Steering diameter	2,80 m





K4

 2.500 kg
  6,5 km/h
  10 %

Scan this QR code for further information:



Technical data

Certification	CE
Traction force at hook	1.700 N
Max. tow on flat ground	2.500 kg
Max. forward speed	6,5 km/h
Max. backwards speed	6,5 km/h
Max. slope	10 %

Batteries	AGM 130 Ah
Weight (excl. batteries)	158 kg
Length	1.400 mm
Width	743 mm
Height	1.130 mm
Steering diameter	2,80 m





JACK

 1.500 kg
  500 kg
  12,0 km/h
  15 %

Scan this QR code for further information:




Also available
L version (+ 500mm)

Technical data

Certification	CE
Max. load capacity on flat ground	500 kg
Traction force at hook	1.500 N
Max. tow on flat ground	1.500 kg
Max. forward speed	12,0 km/h
Max. backwards speed	10,0 km/h
Max. slope	15 %

Batteries	AGM 240 Ah
Weight (excl. batteries)	130 kg
Length	1.636 mm
Width	814 mm
Height	1.183 mm
Steering diameter	2,30 m

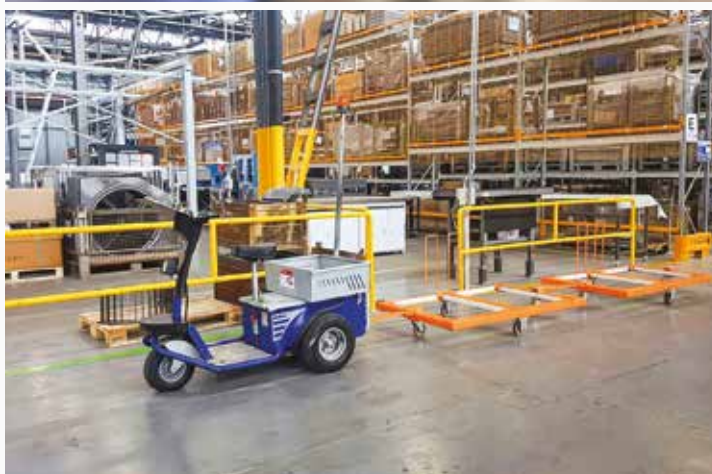

S1



1.500 kg 500 kg 12,0 km/h 15 %

Scan this QR code for further information:



Also available
S2 (+ 500mm)

Technical data

Certification	CE
Max. load capacity on flat ground	500 kg
Traction force at hook	1.500 N
Max. tow on flat ground	1.500 kg
Max. forward speed	12,0 km/h
Max. backwards speed	10,0 km/h
Max. slope	15 %

Batteries	AGM 240 Ah
Weight (excl. batteries)	170 kg
Length	1.611 mm
Width	814 mm
Height	966 mm
Steering diameter	2,30 m







Zallys Service
cares about You



Order parts online 24/7
anytime, anywhere



300+ hours of
video tutorials



www.zallys.com



• • • the passion for moving

Via Palazzina, 1 • 36030 Sarcedo (VI) • ITALY

Products and specifications listed in this catalogue may be subject to change without prior notice.